


TEST REPORT

| | | | |
|----------------------|-----------------------|--------------------|------------|
| Report Ref. | LEI26022371A Original | | |
| Date Received | 27/02/2026 | Date Issued | 20/04/2026 |

| | |
|-----------------------------------|---|
| Company Name & Address | Fabisimo Ltd H4 Upper Brents Faversham, ME13 7DZ GBR |
| Contact Name | [REDACTED] |

| | |
|---------------------------------|---------------------|
| Sample Description | Shimmer Velvet |
| Colour | [REDACTED] |
| Quality | [REDACTED] |
| Supplier | Prinfa [®] |
| End Use | Various |
| No Of Samples | 1 |
| Quoted Fibre Composition | 100% Polyester |
| Retailer | General |

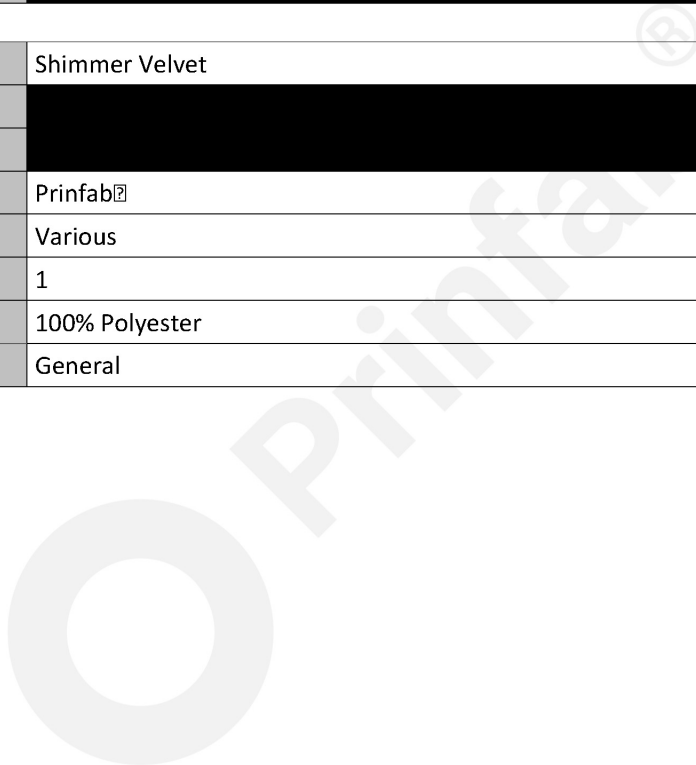

| Test | Method | Sample | Result |
|---|---------------------------|-------------------------------|-------------|
| Martindale Abrasion Resistance - 12 kPa | BS EN 14465: 2003 Annex A | For Shade Changes - See Notes | See Results |

Tests marked (^) in this report have been performed by an approved 3rd party laboratory.
Tests marked (*) in this report are not included in our UKAS scope of accreditation.

Please Note: Martindale Abrasion Shade Changes:-

Shade Change @ 5,000 Revs = Grade 4-5 Cross Stained

Shade Change @ 10,000 Revs = Grade 4-5 Cross Stained

Shade Change @ 15,000 Revs = Ivory = Grade 3-4 Cross Stained All Other Colours = Grade 4

Shade Change @ 20,000 Revs = Ivory = Grade 3-4 Cross Stained All Other Colours = Grade 4

Shade Change @ 25,000 Revs = Ivory = Grade 3-4 Cross Stained All Other Colours = Grade 4

Shade Change @ 30,000 Revs = Ivory = Grade 3 Cross Stained All Other Colours = Grade 3-4

Shade Change @ 35,000 Revs = Grade 3-4 Cross Stained

Shade Change @ 40,000 Revs = Grade 3-4 Cross Stained

Shade Change @ 45,000 Revs = Purple/Green = Grade 3 All Other Colours = Grade 2



Rachael Cartwright
(Jobsheet Technician)

Martindale Abrasion Resistance - 12 kPa BS EN 14465: 2003 Annex A

Conditioning Parameters: 20°C±2°C & 65% rH±4% rH

Sample: For Shade Changes - See Notes

| | Results | Requirements | | |
|--|---------------------------|---------------------|--------------------------------------|---------|
| Shade Change @ 3000 revs | 4 - 5 | | | |
| | Abrasion Resistance* | Performance level | | |
| Specimen 1 | >45000 Revs | A = 45,000 | | |
| Specimen 2 | >45000 Revs | B = 25,000 - 40,000 | | |
| Specimen 3 | >45000 Revs | C = 10,000 - 20,000 | | |
| Overall result** | >45000 Revs | | | |
| Overall performance level | A | | | |
| Test information | | | | |
| Test load: 12 kPa | | | | |
| Fabric Type | Woven cut pile | | | |
| Breakdown criteria | None found | | | |
| Inspection interval | Every 5000 Revs | | | |
| Foam used | Yes | | | |
| Observation Technique Used | 10-Fold Magnification Aid | | | |
| *The abrasion resistance result is the last inspection point at which no breakdown was observed. | | | | |
| **The overall result is the lowest individual test result of all the test specimens tested. | | | | |
| BS 2543: 2004 Classification (Minimum levels for customer reference) | | | | |
| | Flat woven | Figured weave | Woven/Flocked/Non-Woven Pile Fabrics | Knitted |
| Light Domestic | 15,000 | 12,000 | 15,000 | 15,000 |
| General Domestic | 20,000 | 15,000 | 20,000 | 20,000 |
| Heavy Domestic | 25,000 | 20,000 | 25,000 | 25,000 |
| General Contract | 30,000 | 30,000 | 25,000 | 25,000 |
| Severe Contract | 40,000 | 40,000 | 30,000 | 30,000 |

Overall Test Result: See Results

Uncertainty: ±16.8%

| Report Type | Issue Date | Revision Reason | Revision Description |
|-------------|------------|-------------------------|----------------------|
| Original | 20-Apr-26 | Complete Original Issue | N/A |

The client acknowledges and agrees that any services provided and/or reports produced by Intertek are done so within the limits of the scope of work agreed pursuant to the client's specific instructions. This report relates specifically to the sample(s) tested that were drawn and delivered by the client or their nominated third party. Intertek does not make any representation or warranty for any bulk samples or certify the bulk samples received from the client. Furthermore, Intertek does not provide a warranty or verification on the sample(s) representing any specific goods, material and/or shipment and only relate to the sample(s) as received and tested. Intertek have aimed to conduct the review on a diligent and careful basis and we do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise, except in the event of our gross negligence or willful misconduct. In no event, will the contents of any reports or any extracts, excerpts or parts of any reports be distributed or published without the prior written consent of Intertek in each instance. Only the client is authorized to permit copying or distribution of this report (and then only in its entirety). Any such third parties to whom this report may be circulated rely on the content of the report solely at their own risk.

The reported expanded uncertainty is based on a standard uncertainty multiplied by a coverage factor of $k = 2$, providing a level of confidence of approximately 95 %. Unless otherwise specified all compliance and pass/fail statements are binary simple acceptance based on the tolerance interval and, with the exception of graded methods, a test uncertainty ratio greater (TUR) than 4:1. For graded methods the TUR will drop to as low as 0.5:1 when the tolerance limits are within a grade division of the upper scale limit. The Uncertainty budgets are stated for each Test method, these are for reference and where a % value is stated it should be applied to the stated result, this % value is accurate at the acceptance limit, where results are significantly different to the acceptance limit the calculated uncertainty may be over or understated. Uncertainty should be carefully considered when results are on or close to Specification Limits / Requirements - in such cases it should be noted that the risk of false acceptance or rejection may be as high as 50%, for further information please refer to ILAC G8.